

## **AIR FILTER MONITOR**

PART# 135 RED DISPLAY 235 BLUE DISPLAY

### **INTRODUCTION:**

- RANGE 1 To 42 "H2O
- Display will gradually dim as sun sets for easy night viewing
- Input voltage 8 - 18 VDC.
- Current draw - Max 100 ma (.1 amps) at full brightness

### **OPERATION:**

Programmable "Filter Change Light" Rang 1 to 42 "H2O

- The gauge is factory set to turn the light on at 18 "H2O

#### TO CHANGE TO A DIFFERENT POINT TO TURN ON THE CHANGE LIGHT


- With power turned off to gauge, use a paper clip to press the switch in the lower right of the gauge. Small hole in lower right of Lens
- Press and HOLD the switch and turn on power to gauge.
- Release the switch and press the switch until you reach the point where you want the light to come on. When you reach the setting you want, release the switch and wait a few seconds and then turn the power off to the gauge. The gauge is now programmed and will not lose its setting.

\*The sample rate is set to read and average 10 times every second.

The gauge will always start at zero when first turned on, but will quickly sample and display the reading you had last time the truck was running.\*

### **INSTALLATION:**

- Mount gauge in dash using the supplied mounting bracket.

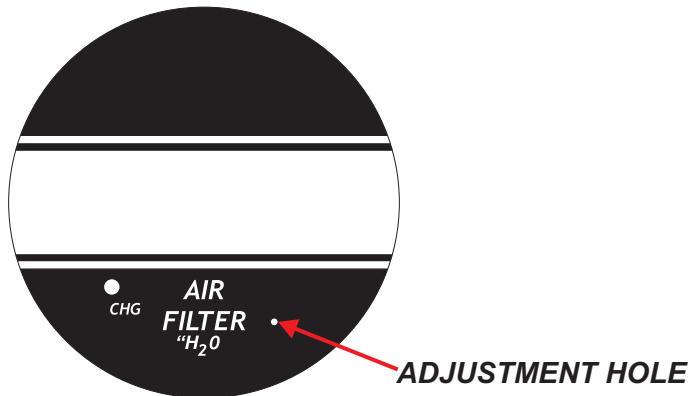

**Digital Gauge Manufacture - Made in America - LifeTime Warranty**

Toll free 800.835.8367 Local 775.425.2660 Fax 775.425.0392

Web Site <http://www.teltek.us>