



TELTEK U.S.A. INC

145 ISIDOR CT SUITE D & E
SPARKS, NV 89441

Made in America

DC AMP METER

±120 AMPS

PART# 180 Red 280 Blue 680 RED 780 BLUE

- * **INPUT VOLTAGE TO GAUGE 9 to 18 VDC 150 ma Max.**
- * **MEASURING RANGE -120 to +120 DC AMPS ACCURACY ± 1 AMP**

INSTALLATION INSTRUCTIONS

1. DISCONNECT THE 2 NEGATIVE BATTERY CABLES COMING FROM THE BATTERY BOX TO THE STARTER.

"NOTE" YOUR MEMORY CHANNELS IN YOUR RADIO MAYBE LOST AND WILL HAVE TO BE RE-PROGRAMMED.

3. CONNECT THE 2 NEGATIVE BATTERY CABLES FROM THE BATTERY BOX TO THE 12" BATTERY CABLE EXTENSION

2. ROUTE THE 12" BATTERY CABLE THROUGH THE CURRENT SENSOR AND CONNECT TO THE STARTER GROUND.

ROUTE THE CABLE THROUGH THE SENSOR PER THE DRAWING.

3. SECURE THE SENSOR TO THE CABLE WITH THE 2 WIRE TIES INCLUDED.

4. PLUG THE CABLE ASSEMBLY INTO THE SENSOR AND ROUTE THE CABLE TO THE DASH AND PLUG INTO THE GAUGE.

5. CONNECT *GROUND* AND A *SWITCHED* +12 TO THE GAUGE.


SEE INSTALLATION INSTRUCTIONS - OTHER SIDE

LIFE TIME WARRANTY*

**EXCLUDING SENSOR & SENSOR CABLE ASSEMBLY
CONTACT TELTEK FOR WARRANTY ISSUES**

Digital Gauge Manufacture - Made in America - LifeTime Warranty

Toll free 800.835.8367 Local 775.425.2660 Fax 775.425.0391
Web Site <http://www.teltek.us> email teltek@teltek.us

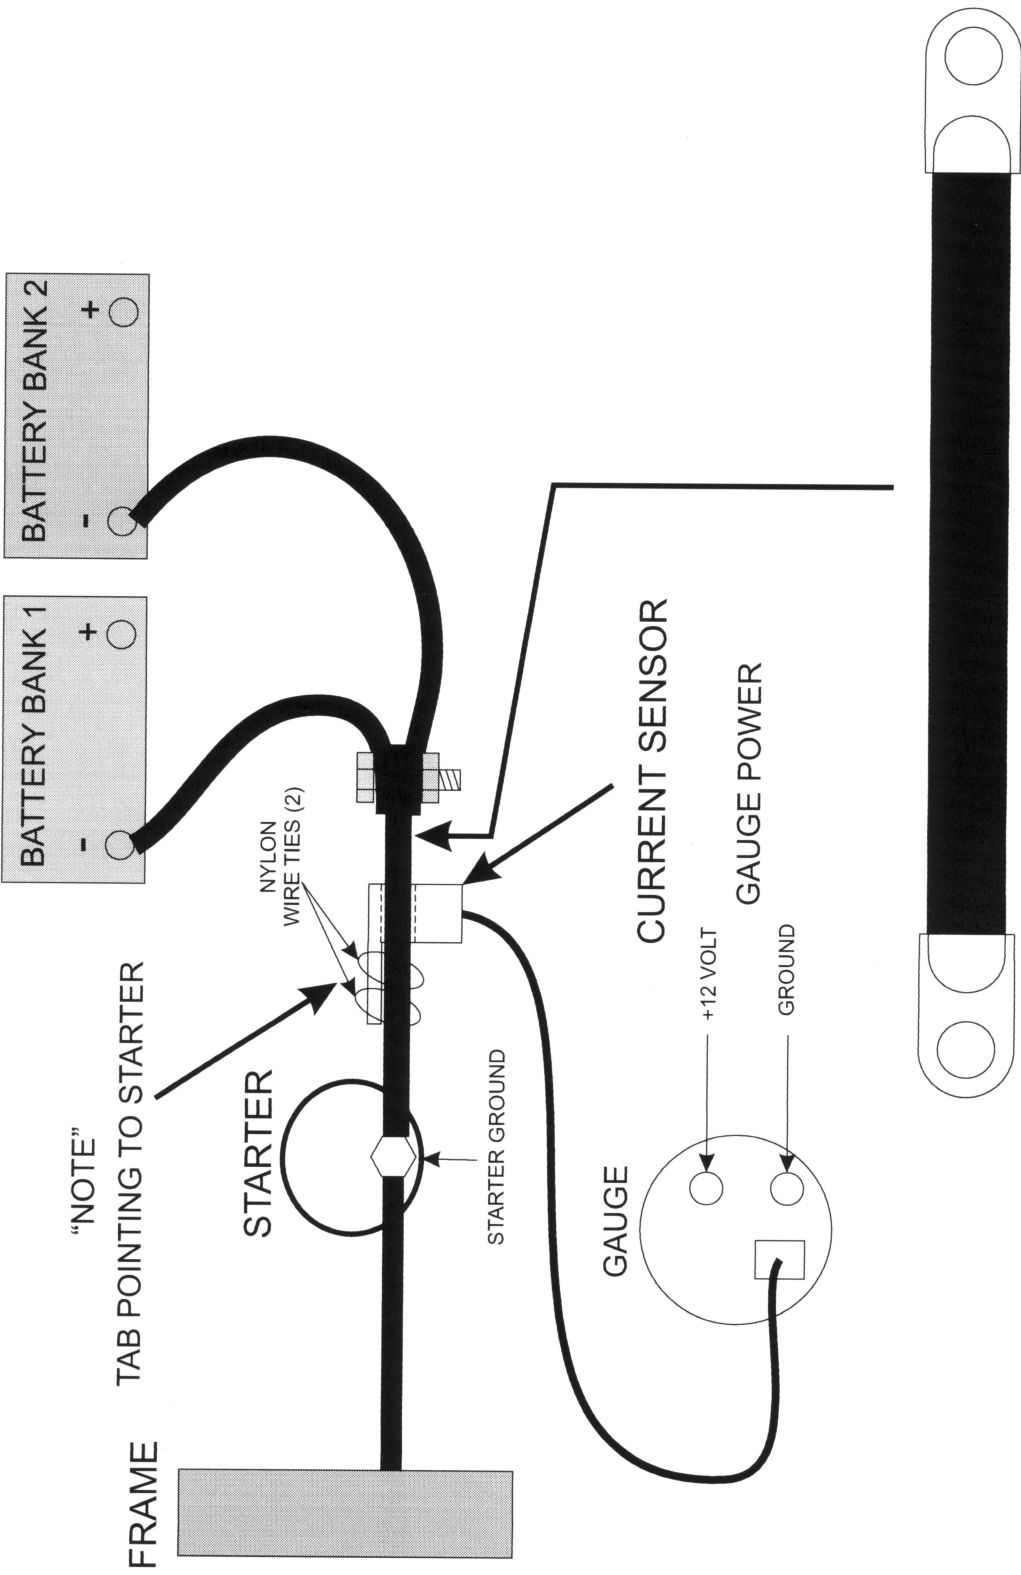

12" ROUND BATTERY CABLE
* NOT SUPPLIED WITH GAUGE *